


PRODUCT DETAIL

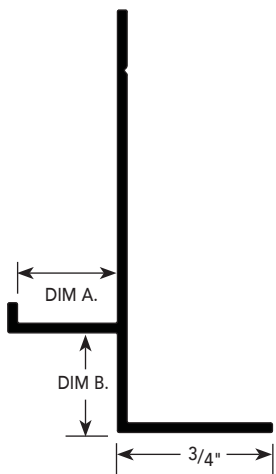

USAGE

Fry Reglet Acoustical Molding creates an attractive step or offset between vertical drywall fascia and acoustical ceiling. Provides support for acoustical material.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Acoustical Molding, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.


SIZES

DIM. A STEP WIDTH	DIM. B STEP DEPTH	USAGE	NUMBER
1/2"	1/2"	1/2" Drywall	FDA-50
5/8"	5/8"	5/8" Drywall	FDA-625
3/4"	3/4"	3/4" Plaster	FDA-75

INSTALLATION DETAIL / Cross Section

DF.4

**ACOUSTICAL
MOLDING**

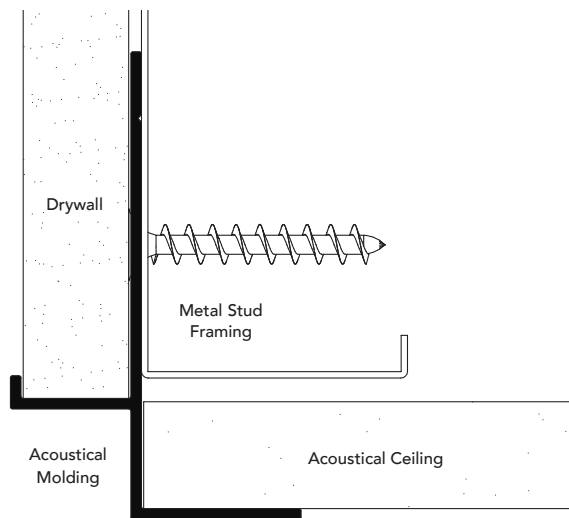

INSTALLATION DETAIL / ISO View

