


PRODUCT DETAIL

PH.4

**E.I.F.S.
SOFFIT VENT
DIRECT APPLIED**

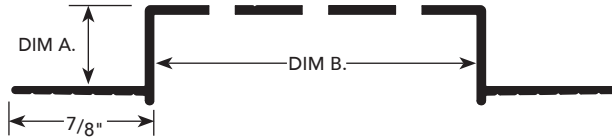


USAGE

Fry Reglet E.I.F.S. Soffit Vent Direct Applied is sized for use with direct applied E.I.F.S. substrate in soffits with an E.I.F.S. system. Forms attractive reveal and provides air flow into spaces above soffit.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet E.I.F.S. Soffit Vent Direct Applied, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

INSTALLATION DETAIL / Cross Section

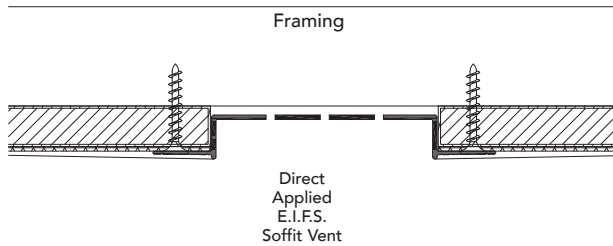

*Denglass Gold, Durock, or other approved DEF substrate.
*Refer to EIFS manufacturer for installation requirements

SIZES*

DIM. A	DIM. B REVEAL WIDTH	NUMBER
1/2"	1/2"	DRM-50-V-50
1/2"	5/8"	DRM-50-V-625
1/2"	3/4"	DRM-50-V-75
1/2"	1"	DRM-50-V-100
1/2"	1 1/2"	DRM-50-V-150
1/2"	2"	DRM-50-V-200
1/2"	2 1/2"	DRM-50-V-250
1/2"	3"	DRM-50-V-300
1/2"	4"	DRM-50-V-400

DIM. A	DIM. B REVEAL WIDTH	NUMBER
5/8"	1/2"	DRM-625-V-50
5/8"	5/8"	DRM-625-V-625
5/8"	3/4"	DRM-625-V-75
5/8"	1"	DRM-625-V-100
5/8"	1 1/4"	DRM-625-V-125
5/8"	1 1/2"	DRM-625-V-150
5/8"	2"	DRM-625-V-200
5/8"	2 1/2"	DRM-625-V-250
5/8"	3"	DRM-625-V-300
5/8"	4"	DRM-625-V-400
5/8"	6"	DRM-625-V-600

*See page PJ-1 for data on number of vents and amount of vented area/sq. ft.