


**DB.1**

**PRODUCT DETAIL**


**INSTALLATION DETAIL / Cross Section**

**DRYWALL  
EXPANSION  
JOINT**

**2-PIECE ONE COMPRESSION SEAL**

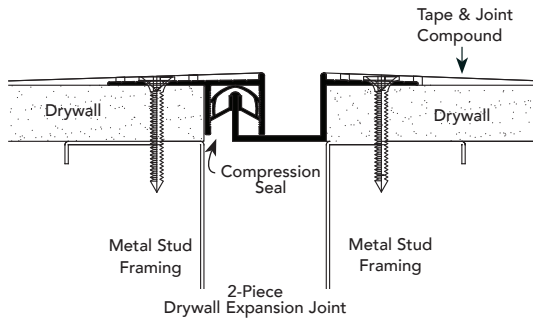

**3-PIECE TWO COMPRESSION SEALS**

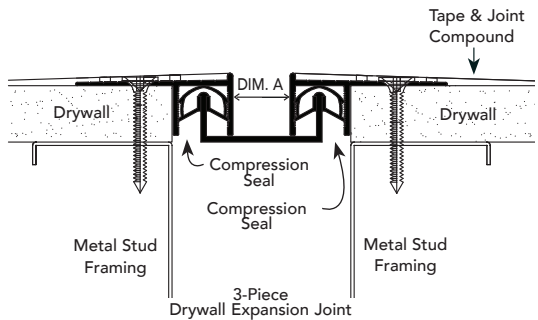

**USAGE**

Fry Reglet Drywall Expansion joint is used in long drywall runs to prevent cracking of drywall joints caused by minor settling in normal building conditions, when installed in accordance with ASTM C1063. Continuous compression seal prevents air and dirt infiltration through joint. Forms an attractive reveal consistent with detailing offered by other Fry Reglet moldings. Expansion joint allows for 3/8" overall movement.

**GUIDE SPECIFICATION**

Where indicated on drawings, Fry Reglet Drywall Expansion Joint, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

**SIZES**

GROUND	DIM. A REVEAL WIDTH	NUMBER	
		2-PIECE	3-PIECE
1/2"	1/4"	DRM-50-25 2-PC	–
1/2"	1/2"	DRM-50-50 2-PC	DRM-50-50 3-PC
1/2"	3/4"	DRM-50-75 2-PC	DRM-50-75 3-PC
1/2"	1"	–	DRM-50-100 3-PC
1/2"	1 1/2"	DRM-50-150 2-PC	DRM-50-150 3-PC