


PRODUCT DETAIL

INSTALLATION DETAIL / Cross Section


PH.6

**E.I.F.S.
DRIP
SCREED**


DS-75-75

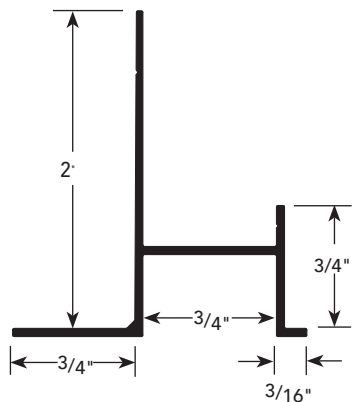


DS-75-75

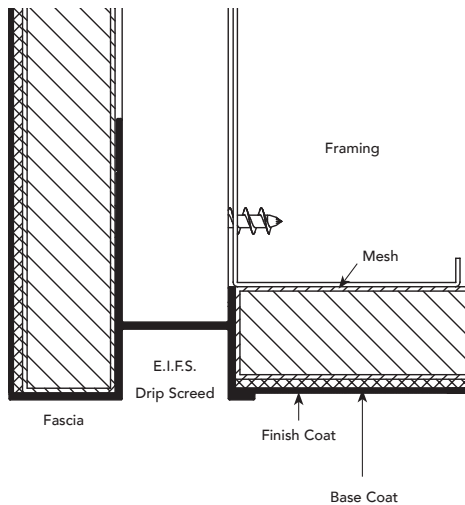

DS-75-200/300

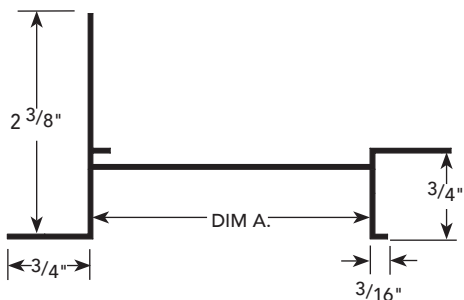

DS-75-200/300

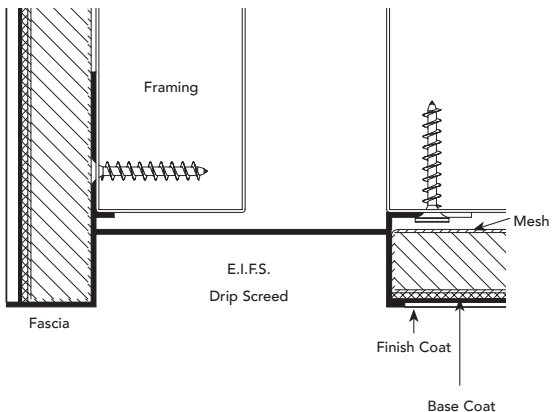

USAGE

Fry Reglet E.I.F.S. Drip Screed neatly joins soffit and fascia while providing a drip joint to prevent water stains on soffit and vertical wall of building. Can be vented if air movement is required. Accommodates a 3/4" plaster fascia and soffit thickness of 7/8" or less (by trimming vertical leg on soffit side of molding).

GUIDE SPECIFICATION

Where indicated on drawings, E.I.F.S. Drip Screed, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

SIZES*

DIM. A REVEAL WIDTH	NUMBER	
	NON-VENTED	VENTED
3/4"	DS-75-75	DS-75-V-75
2"	DS-75-200	DS-75-V-200
3"	DS-75-300	DS-75-V-300

*See page PJ-1 for data on number of vents and amount of vented area/sq. ft.