



DF.7

PRODUCT DETAIL

"J" ACOUSTICAL TRIM



INSTALLATION DETAIL / Cross Section

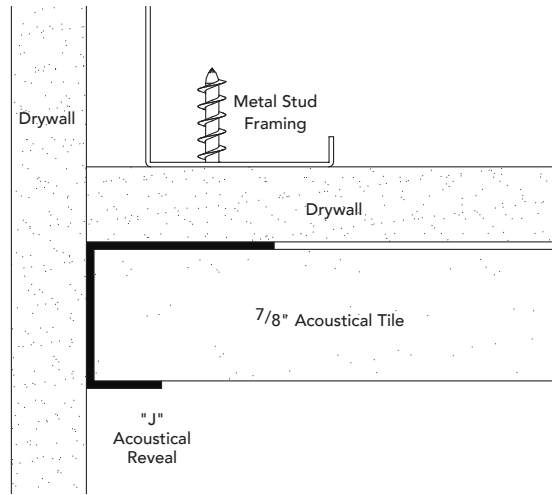

USAGE

Fry Reglet "J" Acoustical Trim provides a clean termination for installation of 7/8" acoustical tile in glued-in acoustic ceiling applications. Trim is installed with appropriate fasteners at ceiling/wall joint. Tile is then inserted into cavity and glued to ceiling substrate.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet "J" Acoustical Trim, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

SIZES

"J" DEPTH	NUMBER
7/8"	JAM-875

INSTALLATION DETAIL / ISO View

