



PRODUCT DETAIL

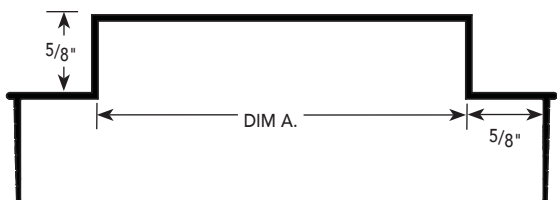

INSTALLATION DETAIL / Cross Section

DC.9

TOP TRACK

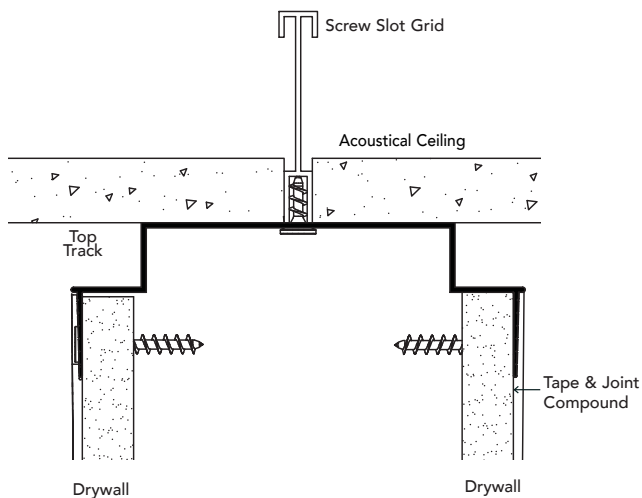

USAGE

Fry Reglet Top Track finishes an intersection of a wall or partition containing a ceiling with a clean reveal appearance. With a screw-slot grid system, the top track can be screwed into the ceiling to fasten wall in place.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Top Track, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to Finish Section.

SIZES

REVEAL DEPTH (DRYWALL THICKNESS)	DIM. A STUD WIDTH	NUMBER
5/8"	3 5/8"	DMTT-625-3750

INSTALLATION DETAIL / ISO View

