
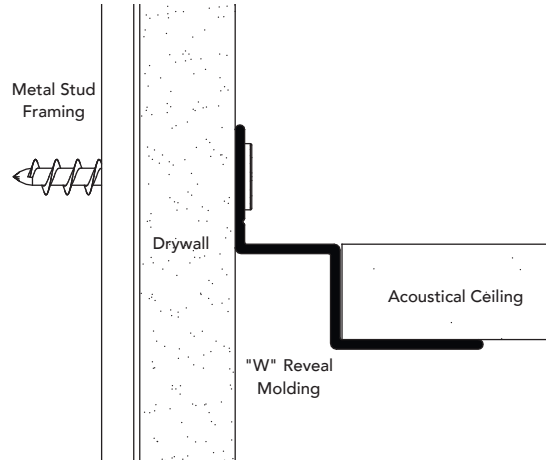


"W" REVEAL MOLDING

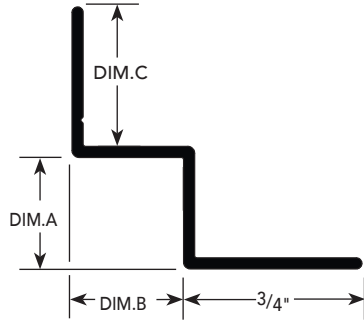


USAGE

Fry Reglet "W" Reveal Molding is used to form a reveal between wall and suspended ceiling, creating a crisp transition. Applications include terminating a soffit from a vertical wall, adding shadow highlights to ceiling/wall interface, creating a crisp reveal termination at top of a square column and providing support for ceiling systems. Available vented for room/plenum air flow.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet "W" Reveal Molding, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with chemical conversion coating, clear anodized or other specified finish. Refer to finish section.

INSTALLATION DETAIL / ISO View

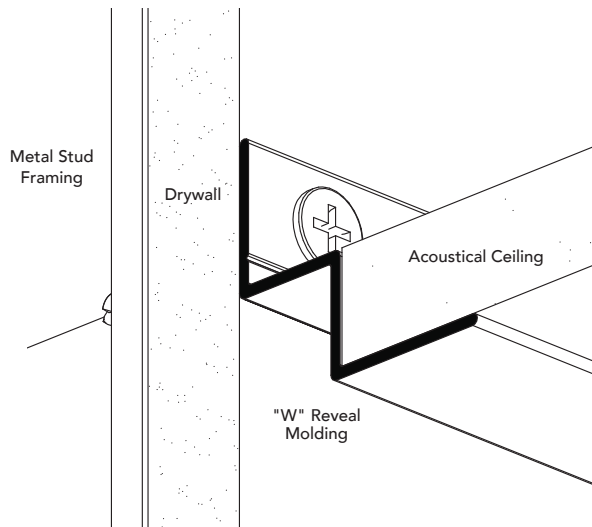

SIZES

DIM. A REVEAL DEPTH	DIM. B REVEAL WIDTH	DIM. C REVEAL DEPTH	NUMBER	
			NON-VENTED	VENTED
1/2"	1/2"	5/8"	WDM-50-50-625	WDM-50-V-50-625
1/2"	3/4"	1"	WDM-50-75	WDM-50-V-75
5/8"	3/4"	1"	WDM-625-75	WDM-625-V-75
3/4"	3/4"	5/8"	WRM-75-75-625	WRM-75-V-75-625