



PRODUCT DETAIL

MWCLEAT 25



INSTALLATION DETAIL / Cross Section

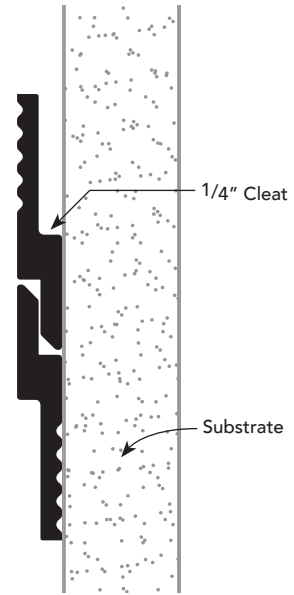

USAGE

Fry Reglet Millwork Cleat is used to install 1/2", 3/4" or 1" millwork panels by providing straight, secure, horizontal attachments at the substrate. Cleat provides 3/8" lift off.

GUIDE SPECIFICATION

Where indicated on drawings, Millwork Cleat, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with clear anodized, colored anodized or powder coat finish.

INSTALLATION DETAIL / ISO View

