



PRODUCT DETAIL

LIGHTED U CHANNEL



INSTALLATION DETAIL / Cross Section

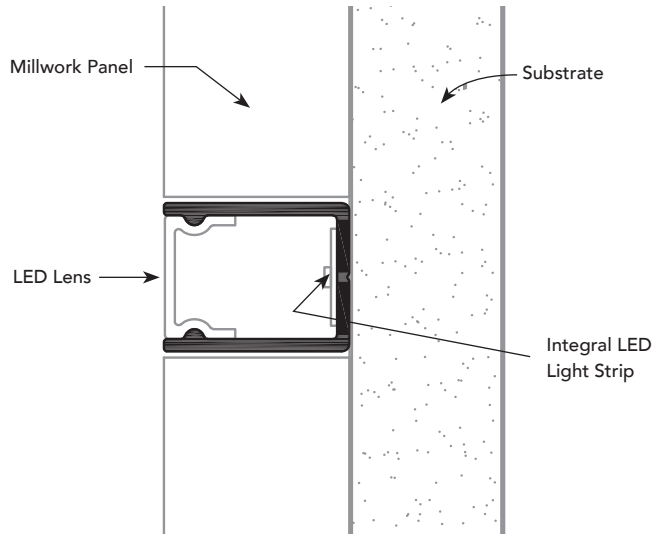


USAGE

Fry Reglet Lighted U Channel installs in 1/2", 3/4" or 1" Millwork and provides a continuous band of light horizontally or vertically. Frosted lens included.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Lighted U Channel, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with clear anodized or powder coat finish. Specify length and Kelvin temperature.

INSTALLATION DETAIL / ISO View

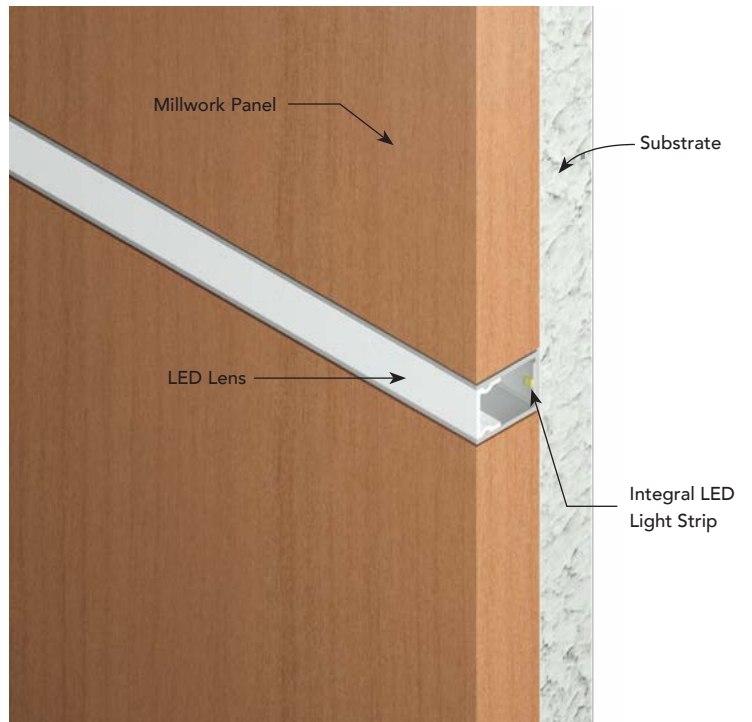

SIZES

DIM A	NUMBER
1/2"	LED-MWU50
3/4"	LED-MWU75
1"	LED-MWU100

LIGHTING OPTIONS

LIGHTED U CHANNEL

LED'S / FT	KELVIN	LENGTH	PART #
32	2700	2'	LED-MWU_A2C
		4'	LED-MWU_A4C
		6'	LED-MWU_A6C
		8'	LED-MWU_A8C
		10'	LED-MWU_A10C
	3000	2'	LED-MWU_B2C
		4'	LED-MWU_B4C
		6'	LED-MWU_B6C
		8'	LED-MWU_B8C
		10'	LED-MWU_B10C
	3500	2'	LED-MWU_C2C
		4'	LED-MWU_C4C
		6'	LED-MWU_C6C
		8'	LED-MWU_C8C
		10'	LED-MWU_C10C
	4000	2'	LED-MWU_D2C
		4'	LED-MWU_D4C
		6'	LED-MWU_D6C
		8'	LED-MWU_D8C
		10'	LED-MWU_D10C

C = CLEAR ANODIZED

P = PAINTED

Example: LED-MWU100A2C/P

