
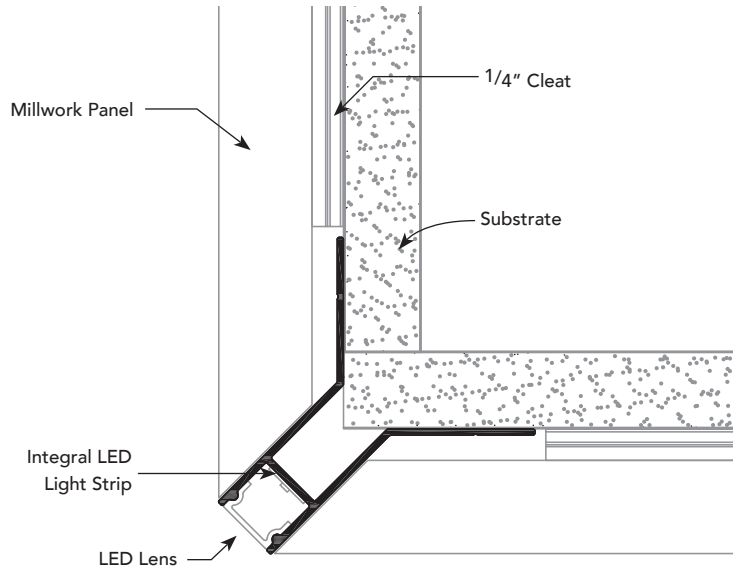


PRODUCT DETAIL

INSTALLATION DETAIL / Cross Section

LIGHTED MILLWORK REVEAL 135° OUTSIDE CORNER

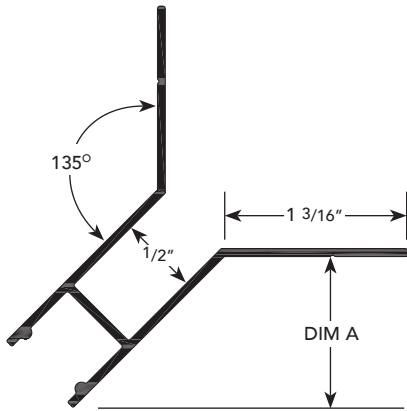

USAGE

Fry Reglet Lighted Millwork Reveal 135° Outside Corner installs with 1/2", 3/4" or 1" millwork panels, ensures a straight and true outside corner, and provides a continuous band of light vertically at corners of millwork. Frosted lens included.


GUIDE SPECIFICATION

Where indicated on drawings, Lighted Millwork Reveal 135° Outside Corner, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with clear anodized, colored anodized or powder coat finish. Specify length and Kelvin temperature.

SIZES

DIM A	NUMBER
1/2"	LED-MWROSC5050
3/4"	LED-MWROSC7550
1"	LED-MWROSC10050

INSTALLATION DETAIL / ISO View

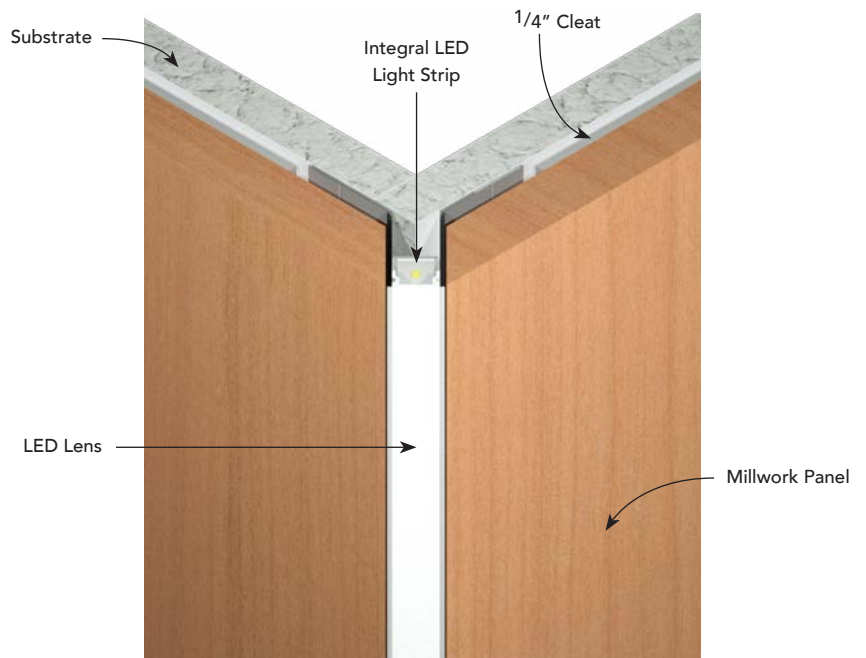

LIGHTING OPTIONS

**LIGHTED MILLWORK
REVEAL 135°
OUTSIDE CORNER**

LED'S / FT	KELVIN	LENGTH	PART #
32	2700	2'	LED-MWROSC_A2C
		4'	LED-MWROSC_A4C
		6'	LED-MWROSC_A6C
		8'	LED-MWROSC_A8C
		10'	LED-MWROSC_A10C
	3000	2'	LED-MWROSC_B2C
		4'	LED-MWROSC_B4C
		6'	LED-MWROSC_B6C
		8'	LED-MWROSC_B8C
		10'	LED-MWROSC_B10C
	3500	2'	LED-MWROSC_C2C
		4'	LED-MWROSC_C4C
		6'	LED-MWROSC_C6C
		8'	LED-MWROSC_C8C
		10'	LED-MWROSC_C10C
	4000	2'	LED-MWROSC_D2C
		4'	LED-MWROSC_D4C
		6'	LED-MWROSC_D6C
		8'	LED-MWROSC_D8C
		10'	LED-MWROSC_D10C

C = CLEAR ANODIZED

P = PAINTED

Example: LED-MWROSC10050A2C/P

