



PRODUCT DETAIL


LIGHTED U CHANNEL



INSTALLATION DETAIL / Cross Section

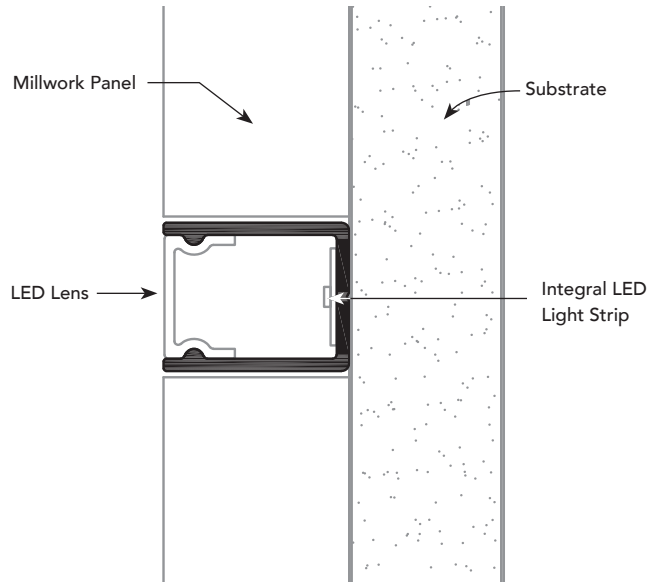

INSTALLATION DETAIL / ISO View

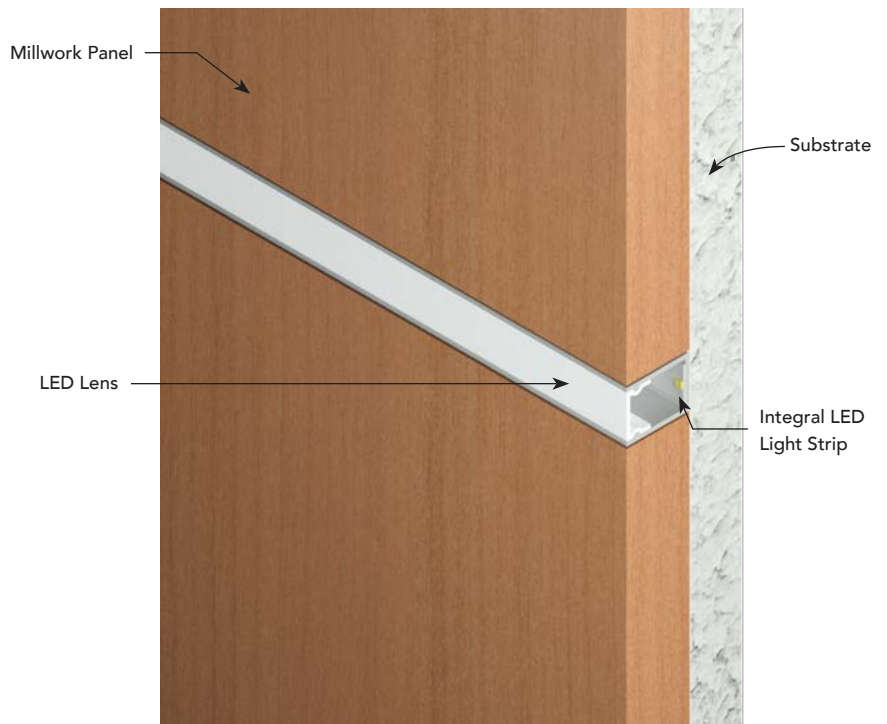

USAGE

Fry Reglet Lighted U Channel installs in 1/2", 3/4" or 1" Millwork and provides a continuous band of light horizontally or vertically. Frosted lens included.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Lighted U Channel, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with clear anodized, colored anodized or powder coat finish. Specify length and Kelvin temperature.

SIZES

DIM A	NUMBER
1/2"	LED-MWU5050
3/4"	LED-MWU7550
1"	LED-MWU10050

LIGHTING OPTIONS

LIGHTED U CHANNEL

LED'S / FT	KELVIN	LENGTH	PART #
32	2700	2'	LED-MWU_A2C
		4'	LED-MWU_A4C
		6'	LED-MWU_A6C
		8'	LED-MWU_A8C
		10'	LED-MWU_A10C
	3000	2'	LED-MWU_B2C
		4'	LED-MWU_B4C
		6'	LED-MWU_B6C
		8'	LED-MWU_B8C
		10'	LED-MWU_B10C
	3500	2'	LED-MWU_C2C
		4'	LED-MWU_C4C
		6'	LED-MWU_C6C
		8'	LED-MWU_C8C
		10'	LED-MWU_C10C
	4000	2'	LED-MWU_D2C
		4'	LED-MWU_D4C
		6'	LED-MWU_D6C
		8'	LED-MWU_D8C
		10'	LED-MWU_D10C

C = CLEAR ANODIZED

P = PAINTED

Example: LED-MWU10050A2C/P

