
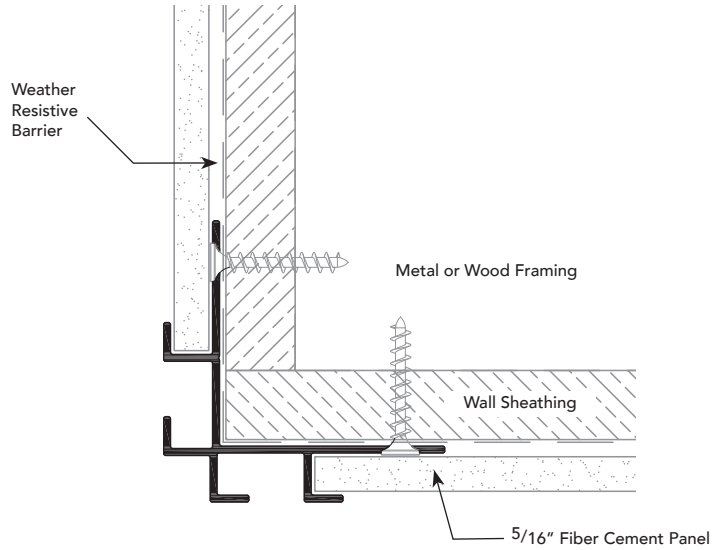


DOUBLE OSC

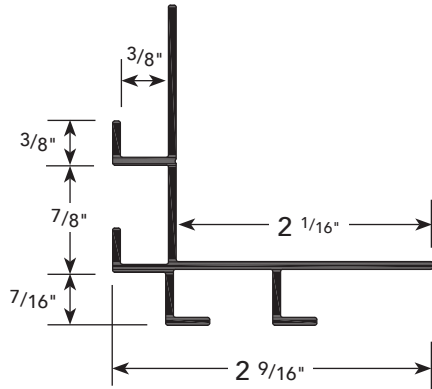

USAGE


Fry Reglet FCP Double Outside Corner creates a straight and true abuse resistant outside corner. Exposed flanges cover the vertical ends of the fiber cement panels and double vertical 1/2" reveals to enhance the building aesthetic.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Double Outside Corner, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with primed finish, clear anodized or other specified finish. Refer to finish section.

NOTE: Attach panel in accordance with the manufacturers fastening schedule. Not to be used in horizontal applications.

INSTALLATION DETAIL / ISO View

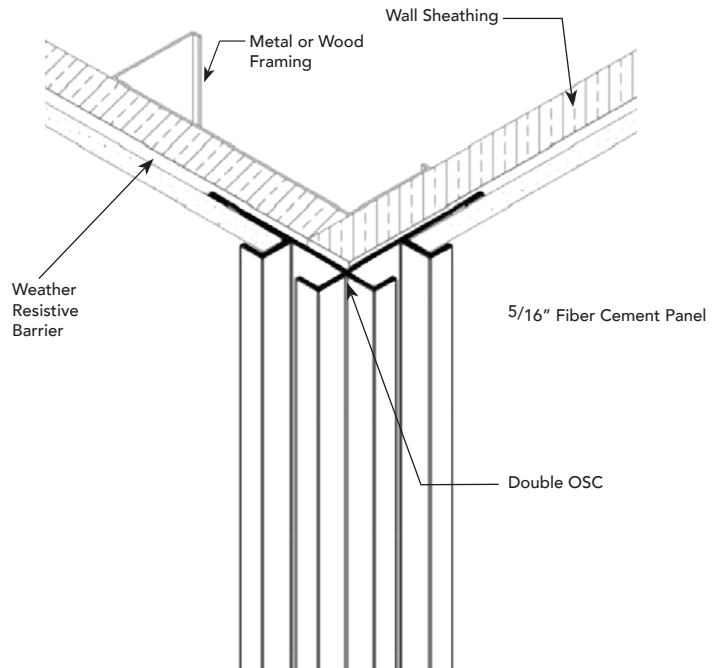

SIZES

REVEAL DEPTH	NUMBER
NOM. 3/8"	FCP-DBLOSC