


PRODUCT DETAIL

FLUSH REVEAL BASE

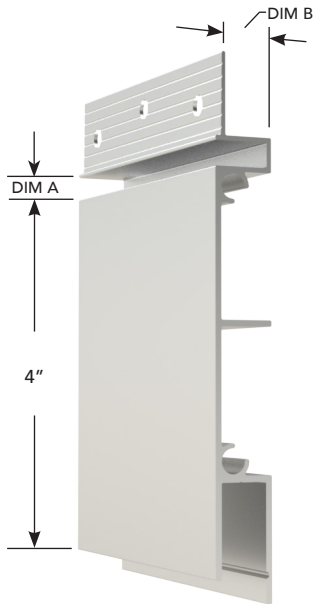

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Flush Base with Reveal as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5 with Chemical Conversion Coating, clear anodized, or other specified finish. Refer to finish section.

SIZES

DIM A	DIM B	NUMBER
1/4"	1/2"	DRMBFLR5025400
1/2"	1/2"	DRMBFLR5050400
1/4"	5/8"	DRMBFLR62525400
1/2"	5/8"	DRMBFLR62550400

INSTALLATION DETAIL / Cross Section

USAGE

Fry Reglet Flush Reveal Base is used at the bottom of the wall to form a modern, impact resistant base. This profile can be used with any type of flooring. A unique, breakaway floor lock tab keeps the base tight to the wall framing or can be easily removed if the base needs to completely abut the floor. In this case, use construction adhesive to adhere the backside of the base to the framing/sub structure. Supplied alignment dowels are inserted into the channel to connect sections and insure a straight and flush installation. Available for 1/2" and 5/8" drywall applications.

