


PRODUCT DETAIL

INSTALLATION DETAIL / Cross Section

FLUSH BASE

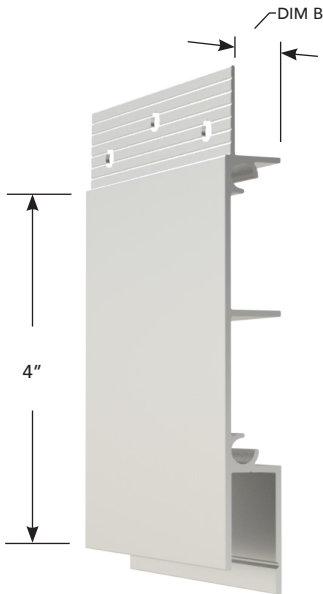

USAGE

Fry Reglet Flush Base is used at the bottom of the wall to form a modern, impact resistant base. This profile can be used with any type of flooring. A unique, breakaway floor lock tab keeps the base tight to the wall framing or can be easily removed if the base needs to completely abut the floor. In this case, use construction adhesive to adhere the backside of the base to the framing/sub structure. Supplied alignment dowels are inserted into the channel to connect sections and insure a straight and flush installation. Available for 1/2" and 5/8" drywall applications.

GUIDE SPECIFICATION

Where indicated on drawings, Fry Reglet Flush Base, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5. Finishes available include, Chemical Conversion Coating, Clear or Color anodized, or Powder Coat Paint. Refer to finish section.

SIZES

DIM B	NUMBER
1/2"	DRMBFL50400
5/8"	DRMBFL625400



Section View