
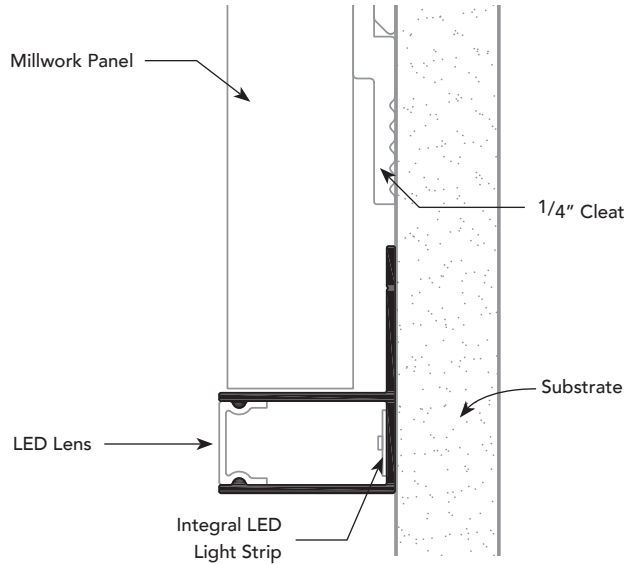


PRODUCT DETAIL

INSTALLATION DETAIL / Cross Section

LIGHTED MILLWORK REVEAL F




USAGE

Fry Reglet Lighted Millwork Reveal F installs with 1/2", 3/4" or 1" millwork panels and provides a continuous band of light horizontally or vertically at ends of millwork. Frosted lens included.

GUIDE SPECIFICATION

Where indicated on drawings, Lighted Millwork Reveal F, as manufactured by Fry Reglet Corporation, shall be installed. Aluminum shall be extruded alloy 6063 T5, with clear anodized, colored anodized or powder coat finish. Specify length and Kelvin temperature.

INSTALLATION DETAIL / ISO View

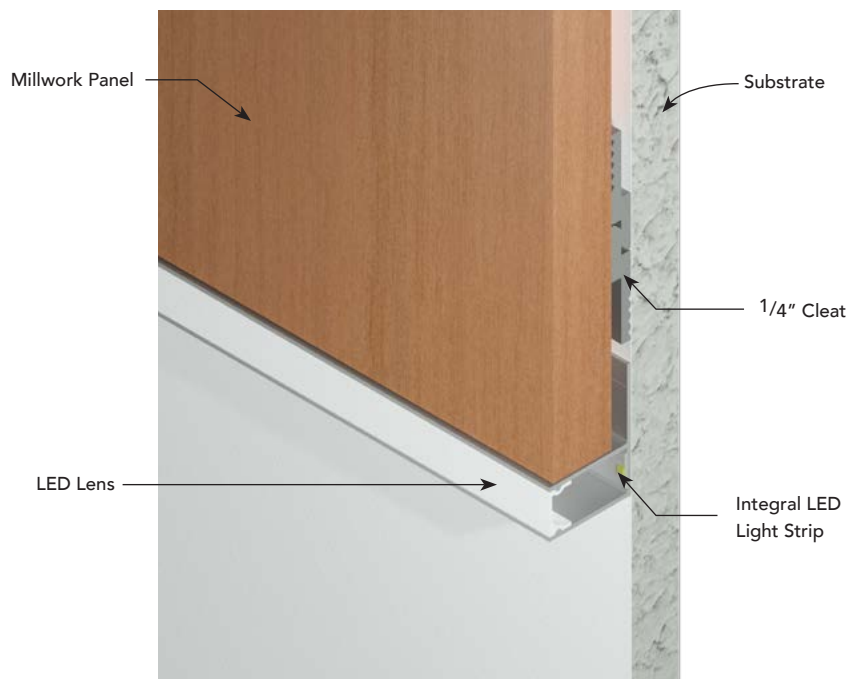

SIZES

DIM A	NUMBER
1/2"	LED-MWRF5050
3/4"	LED-MWRF7550
1"	LED-MWRF10050

**LIGHTING OPTIONS**

**LIGHTED MILLWORK REVEAL F**

LED'S / FT	KELVIN	LENGTH	PART #
32	2700	2'	LED-MWRF_A2C
		4'	LED-MWRF_A4C
		6'	LED-MWRF_A6C
		8'	LED-MWRF_A8C
		10'	LED-MWRF_A10C
	3000	2'	LED-MWRF_B2C
		4'	LED-MWRF_B4C
		6'	LED-MWRF_B6C
		8'	LED-MWRF_B8C
		10'	LED-MWRF_B10C
	3500	2'	LED-MWRF_C2C
		4'	LED-MWRF_C4C
		6'	LED-MWRF_C6C
		8'	LED-MWRF_C8C
		10'	LED-MWRF_C10C
	4000	2'	LED-MWRF_D2C
		4'	LED-MWRF_D4C
		6'	LED-MWRF_D6C
		8'	LED-MWRF_D8C
		10'	LED-MWRF_D10C

C = CLEAR ANODIZED

P = PAINTED

Example: LED-MWRF10050A2C/P

